


# LADDERS & SCAFFOLDING

## BASE PLATE, CASTER & STABILIZING JACK SCREW

Will level your scaffold on uneven terrain and provide secure footing. Choose between the following options:

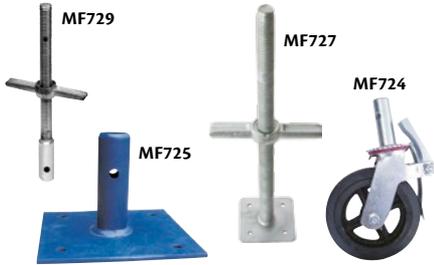

| Model No. | Description                   | Wt. lbs. | Price /Each |
|-----------|-------------------------------|----------|-------------|
| MF724     | 8" Rubber Caster              | 12       |             |
| MF725     | Fixed Base Plate              | 3        |             |
| MF726     | Swivel Base Plate             | 4        |             |
| MF727     | Adjust. Jack Screw w/24" Base | 12       |             |
| MF728     | Adjust. Jack Screw w/32" Base | 15       |             |
| MF729     | Adjustable Jack Screw 24"     | 11       |             |

## WORK PLATFORMS

### ALUMINUM DECK


- Work platform installed with aluminum slip-resistant decking
- For both aluminum and steel scaffolds
- Side rails are made from "I" beam extrusions for added strength
- Dimpled and pierced aluminum decking assures a slip-resistant surface preventing material build-up
- Allows water to run off to help prevent ice build-up in freezing conditions
- 3-piece rung joints produce a tempered joint, making the work platform twist-proof
- For added safety they are fitted with easy-to-use windlocks
- Duty-rated: 75 lbs./sq. ft. (366 kg/m<sup>2</sup>)



| Model No. | Length' | Width" | Weight lbs. | Price/Each |
|-----------|---------|--------|-------------|------------|
| VC249     | 7       | 19     | 25          |            |
| VC250     | 10      | 19     | 40          |            |

## LATERAL SIDE STABILIZER & WALL BRACKETS

Scaffolds should not be stacked higher than 3 times the width of the smallest base. To build a higher scaffold, lateral side stabilizers must be used. If the scaffold is situated near a wall, and its height is superior to three times the width of the base the scaffolding can be secured with wall brackets. Wall brackets are required every 15' in height and every 20' in width.



| Model No. | Description             | Wt. lbs. | Price /Each |
|-----------|-------------------------|----------|-------------|
| MF730     | Lateral Side Stabilizer | 22       |             |
| MF731     | Wall Bracket            | 5        |             |
| MF732     | Screw for Wall Bracket  | 0.1      |             |

### PLYWOOD DECK

- Plywood-decked work platform; 5/8" thick plywood, hooks are offset to allow for next plank hook – no gap when set in continuous scaffolding
- For lightweight construction equipment
- Aluminum edge protects plywood from damage
- Side rails are made from "I" beam extrusions for added strength
- 3-piece rung joints produce a tempered joint, making the work platform twist-proof
- Fitted with easy-to-use windlocks
- 19" widths duty-rated: 75 lbs./sq. ft., 24" widths duty-rated: 50 lbs./sq. ft.



| Model No. | Length' | Width" | Weight lbs. | Price/Each |
|-----------|---------|--------|-------------|------------|
| MF754     | 7       | 19     | 30          |            |
| MF755     | 7       | 24     | 34          |            |
| MF756     | 10      | 19     | 48          |            |
| MF757     | 10      | 24     | 56          |            |


## UNIVERSAL OUTRIGGERS WITH CASTERS SET

- Dimensions: 51.5" x 4" x 52.25" (130.81 x 101.6 x 132.72 cm)
- Weight: 104 lbs.
- Caster Size: 5"
- Caster Type: Double Locking Heavy Duty
- Includes: (4) Outriggers, (4) Casters, (8) Locking Pins
- Standard(s) Met: ANSI, CSA, OSHA



| Model No. | Description                           | Wt. lbs. | Price /Each |
|-----------|---------------------------------------|----------|-------------|
| MP929     | Universal Outriggers with Casters Set | 104      |             |

## ACCESSORIES

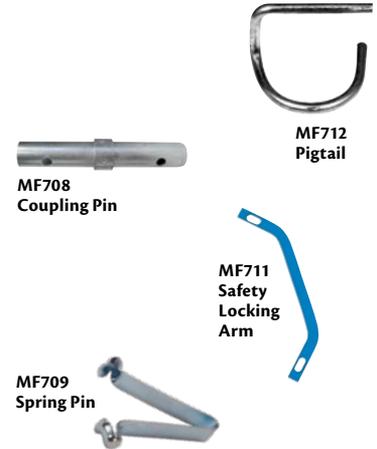

| Model No. | Description        | Wt. lbs. | Price /Each |
|-----------|--------------------|----------|-------------|
| MF708     | Coupling Pin       |          |             |
| MF709     | Spring Pin         |          |             |
| MF711     | Safety Locking Arm | 0.9      |             |
| MF712     | Pigtail            | 0.08     |             |

### GUARD POSTS & RAILS



| Model No. | Description                         | Wt. lbs. | Price /Each |
|-----------|-------------------------------------|----------|-------------|
| MF739     | Guard Post for Guard Rail w/Support | 11       |             |
| MF740     | Guard Rail 30"                      | 1.5      |             |
| MF742     | Guard Rail 45"                      | 2        |             |
| MN530     | Guard Rail 48"                      | 2.5      |             |
| MF743     | Guard Rail 60"                      | 3        |             |
| MF744     | Guard Rail 84"                      | 4        |             |
| MF745     | Guard Rail 120"                     | 6        |             |

## STEEL SCAFFOLDING

- Multi-level working area
- 1" O.D. 16-gauge steel frame
- Two anti-slip 14-gauge steel platforms
- Height: 4'
- Reach: 9'
- 4" heavy-duty double locking casters
- Units fold/collapse for easy storage
- Capacity: 500 lbs.
- Yellow powder coat finish
- Meets and exceeds CSA, OSHA & ANSI standards



VC781

VC782



| Model No. | Overall Dimensions W" x L" x H" | Weight lbs. | Price /Each |
|-----------|---------------------------------|-------------|-------------|
| VC782     | 22 1/2 x 41 x 45 3/4            | 50          |             |
| VC781     | 22 1/2 x 49 1/2 x 57 3/4        | 59          |             |

\* More sizes & options available upon request